ROTARY VALVES

CONNECTION KIT
SERIES KTD100

Connection kit with external thread for use on externaly threaded valves.

KTD100
External thread

VERSIONS

Each package contains three of each of connection pieces, nuts and gaskets.

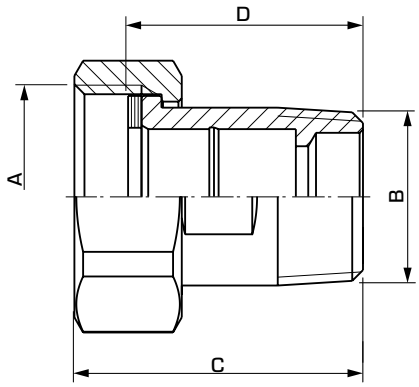

SUITABLE VALVES

The connection kit series KTD100 may most easily be fitted with ESBE mixing valves:

- Series VRG132
- Series VRG142
- Series VRG232
- Series VRG332
- Series VRB142

TECHNICAL DATA

Pressure class: PN10
Media temperature: max. +180°C
min. -20°C
Connection - nipple design: acc. to EN 1254-4
Internal thread (G), ISO 228/1
External thread (R), EN 10226-1

Material
Nut: Brass CW 614N
Connection piece: Dezincification resistant brass, DZR*
Gasket: Unitec 300

* Suitable for drinking water applications

PED 2014/68/EU, article 4.3

SERIES KTD112 EXTERNAL THREAD (3 CONNECTIONS/PACKAGE)

Art. No.	Reference	Connection		Dimension		Note	Weight [kg]
		A	B	C	D		
36551700	KTD112	G 1"	R ¾"	43	35		0,36
36551800	KTD112	G 1¼"	R 1"	48,5	40		0,63
36551900	KTD112	G 1½"	R 1¼"	55,5	45		0,97
36552000	KTD112	G 2"	R 1½"	62	50		1,32
36552100	KTD112	G 2¼"	R 2"	68	55		2,18

© Copyright. Rights reserved to make alterations.