

CIRCULATION UNIT

BIVALENT FUNCTION, SERIES GBA100



GBA111

PRODUCT DESCRIPTION

The ESBE series GBA100 is a circulation mixing unit which is intended for heating circulations where the flow temperature control and the efficient use of energy are required. Equipped with two shut-off valves with thermometers, check valve, high class insulation shell and high efficiency circulation pump. The GBA100 is delivered with the bivalent rotary mixing valve and actuator. The Circulation Mixing Unit ensures efficient use of energy thanks to the bivalent rotary mixing valve, as well as the working possibility with most controllers available on the market.

SERVICE AND MAINTENANCE

The circulation unit does not require any specific maintenance under normal conditions.

PRODUCT ASSORTMENT

KEY BENEFITS

- Efficient use of energy thanks to the bivalent valve
- Ready to use with most controllers available on the market
- High class insulation shell
- One size fits all – auto adapt

RELATED ACCESSORIES

See separate data sheet for further detailed information.

ESBE Manifold

Manifold for 1, 2, or 3 circulation units. With integrated separator function.

Art. No.

66001100 _____ GMA411 - for 1 unit

66001600 _____ GMA521 - for 2 units

66001700 _____ GMA531 - for 3 units

Manifold for 2, 3, 4 or 5 circulation units. Without integrated separator function.


Art. No.

66001200 _____ GMA421 - for 2 units

66001300 _____ GMA431 - for 3 units

66001400 _____ GMA441 - for 4 units

66001500 _____ GMA451 - for 5 units

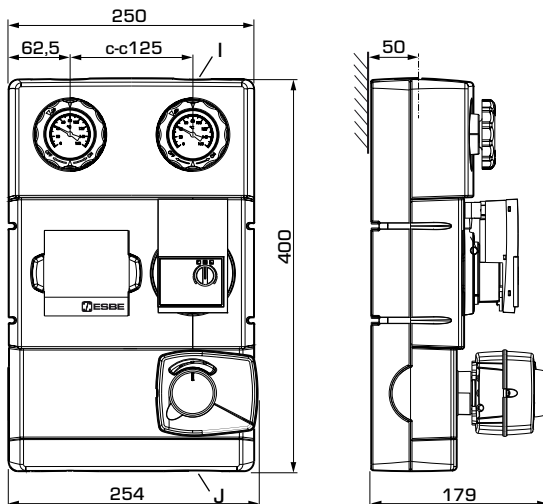

GBA111

SERIES GBA100

Art. No.	Reference	DN	Pump	Connections		Weight [kg]	Note
				I	J		
61060100	GBA111	25	Wilo 25/6	G 1"	G 1½"	5,7	

CIRCULATION UNIT

BIVALENT FUNCTION, SERIES GBA100

TECHNICAL DATA

 Visit esbe.eu for further detailed information.

The Circulation unit, in general:

Pressure class: _____ PN 6
 Media temperature: _____ max. +110°C
 _____ min. 0°C
 Ambient temperature: _____ max. +50°C
 _____ min. 0°C
 Working pressure: _____ 0,6 MPa (6 bar)
 Connections, _____ Internal thread (G), ISO 228/1
 _____ External thread (G), ISO 228/1
 Insulation: _____ EPP λ 0,036 W/mK
 Media: _____ Heating water (in accordance with VDI2035)
 _____ Water / Glycol mixtures, max. 50%.
 (above 20% admixture, the pump data must be checked)
 _____ Water / Ethanol mixtures, max. 28%






Material, in contact with water:

Components of: _____ Brass, Cast iron, Steel
 Sealing material of: _____ PTFE, Aramid fibre, EPDM

EI (Energy Efficiency Index),

Wilo circulation pump: _____ <0,21


Conformities and certificates:

 LVD 2014/35/EU  ErP 2015 
 EMC 2014/30/EU  EnEV2014
 RoHS3 2015/863/EU  PED 2014/68/EU, article 4.3

The integrated bivalent mixing valve:

Max. differential pressure drop: _____ 100 kPa (1 bar)
 Close off pressure: _____ 200 kPa (2 bar)
 Rangeability Kv^{max}/Kv^{min} , A-AB: _____ 100
 Leakrate in % of flow*: _____ < 0,5%
 * Differential pressure 100kPa (1 bar)


VALVE CHARACTERISTICS

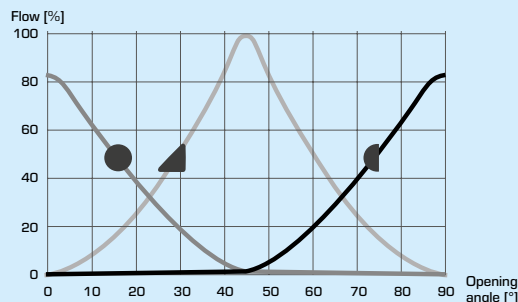

The integrated actuator:

Actuator type: _____ ARA661
 Control signal: _____ 3-point
 Power supply: _____ 230 ± 10% V AC, 50 Hz
 Power consumption: _____ 5 VA
 Running time 90°: _____ 120s
 Enclosure rating: _____ IP41
 Protection class: _____ II


ACTUATOR WIRING*

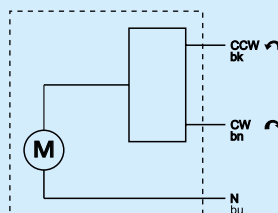

The integrated circulation pump:

Power supply: _____ 230 ± 10% V AC, 50/60 Hz
 Power consumption - Wilo 25/6: _____ 3-45 W
 Enclosure rating: _____ IP X4D
 Insulation class: _____ F
 EEI (Energy Efficiency Index) - Wilo 25/6: _____ <0,20

PUMP WIRING*



* Actuator and Circulation pump should be preceded by a multi-pole contact breaker in the fixed installation.


CIRCULATION UNIT

BIVALENT FUNCTION, SERIES GBA100

DIMENSIONING, PUMP CAPACITY DIAGRAM

Example: Start with the heating demand of heating circuit (e.g. 25 kW) and move horizontally to the right in the diagram to the $\Delta t = 15^\circ\text{C}$ (temperature difference between flow and return of the heating circuit). Next go up and find working point and read the available pressure of the pump on the left - $\Delta p = 45 \text{ kPa}$.

SERIES GBA100 – available pressure, Wilo pump

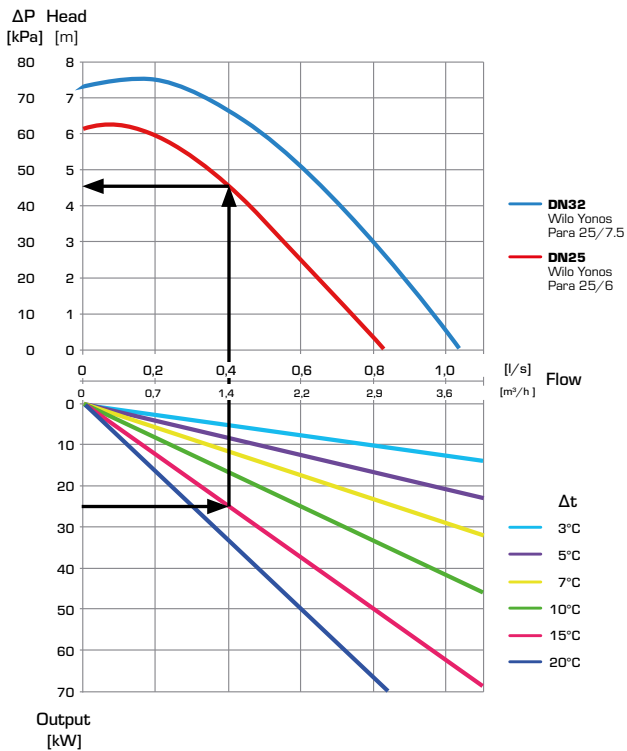


CIRCULATION UNIT


BIVALENT FUNCTION, SERIES GBA100

INSTALLATION EXAMPLES

1

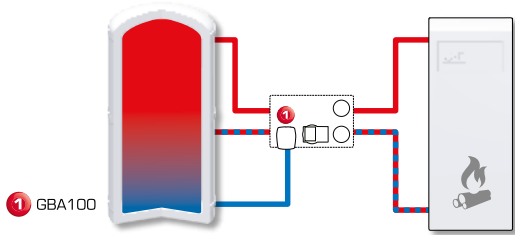

2

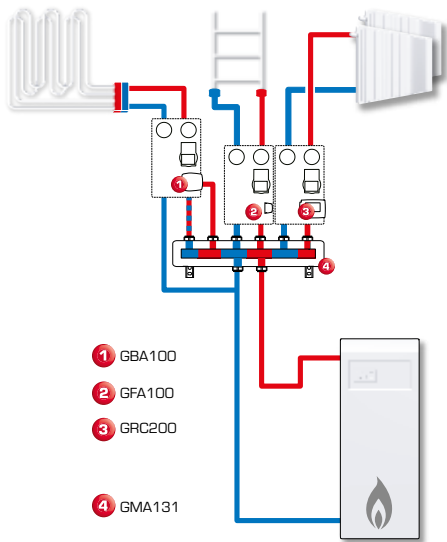

3

