THERMOSTATIC MIXING VALVES

CONNECTION KIT
SERIES KTD200, KTD300

Connection kit with external thread for use on externaly threaded valves.




KTD200
External thread

KTD300
External thread

VERSIONS

Each package contains three of each of connection pieces, nuts and gaskets.

Check valves available according to table.

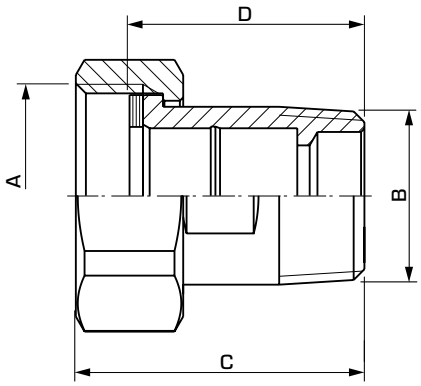

SUITABLE VALVES

The connection kit series KTD200 and KTD300 may most easily be fitted with ESBE thermostatic control units:

- Series VTS522, 552
- Series VTA332, 532
- Series VTA362, 562
- Series VTA322, 522
- Series VTA352, 552
- Series VTA372, 572
- Series VMC312

TECHNICAL DATA

Pressure class: PN10
Media temperature: max. +120°C
min. -20°C
Connection - nipple design: acc. to EN 1254-4
Internal thread (G), ISO 228/1
External thread (R), EN 10226-1

Material
Nut: Brass CW 614N
Connection piece: Dezincification resistant brass, DZR*
Gasket: Unitec 300

* Suitable for drinking water applications

PED 2014/68/EU, article 4.3

SERIES KTD212, 312 EXTERNAL THREAD (3 CONNECTIONS/PACKAGE)

Art. No.	Reference	Connection		Dimension		Note	Weight [kg]
		A	B	C	D		
36552200	KTD212	G 1"	R ¾"	43	35	1)	0,36
36552400	KTD312					2)	0,36
36552300	KTD212	G 1¼"	R 1"	48,5	40	1)	0,63
36552500	KTD312					2)	0,63

Note 1) One check valve included 2) Two check valves included

© Copyright. Rights reserved to make alterations.