

FLUE GAS THERMOSTAT SERIES CTF150



ESBE series CTF150 flue gas thermostat is intended for on/off control of circulation pumps and load units.

OPERATION

ESBE series CTF150 is a flue gas thermostat, consisting of a temperature probe connected to a switch unit. The switch unit can be used to control the electricity supply to a circulation pump or load unit with an integrated circulation pump.

FUNCTION

The thermostat switch can easily be set to any target temperature between 20°C and 240°C by turning the setting knob. If needed, the temperature range can be limited by changing the position of pegs inside the housing of the switch unit.


MOUNTING

The temperature probe can be mounted either directly on the outside of the flue gas pipe, or inside the pipe using the immersion pocket series CTF851. The switch unit is prepared for easy wall mounting. The temperature probe is connected to the switch unit by a 1500 mm line.

OPTIONAL EQUIPMENT

Immersion pocket CTF851 _____ Art. No. 56020200

INSTALLATION EXAMPLE

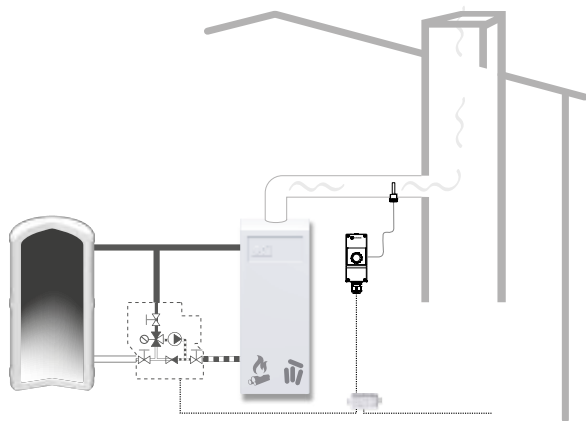

FLUE GAS THERMOSTAT CTF150 DESIGNED FOR

- Heating

TECHNICAL DATA




Ambient temperature - storage: _____ -30°C to +50°C
 - use: _____ 0°C to +50°C
 Enclosure rating: _____ IP54 (EN 60529)
 Contact rating - N/C contact: _____ max. 16(2.5)A, 230 VAC
 - N/O contact: _____ max. 6.3(2.5)A 230VAC
 _____ min: 24V AC/DC, 100mA
 Hysteresis: _____ 7% of the scale range
 Temperature probe: _____ Ø6 mm x 96 mm
 line: _____ Ø1.5 mm x 1500 mm
 Immersion pocket: _____ Ø8 mm x 0.75 mm, length 100 mm
 Weight: _____ 0.2 kg

Material _____
 Case lid: _____ Plastic ABS
 Housing: _____ Plastic PA (inforced)
 Temperature probe: _____ Stainless steel (CrNi, 1.4301)
 insulation: _____ Plastic PVC hose
 Immersion pocket: _____ Stainless steel (CrNi, 1.4571)

CE EN 14597
 LVD 2014/35/EU
 EMC 2014/30/EU

UK
 CA

WIRING

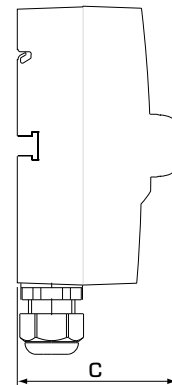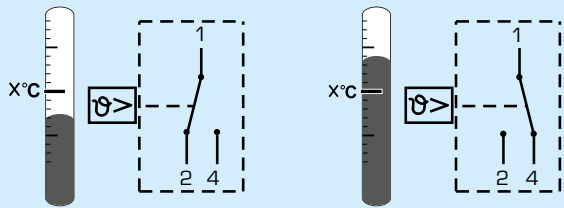

SERIES CTF151

Art. No.	Reference	Switch temp. range	Max. temp. probe	Dimension			Note	Weight [kg]
				A	B	C		
56020100	CTF151	20-240°C	500°C	53	120	70		0.2