CONNECTION KIT
SERIES KTB100

ESBE connection kits for valves with external thread.
One package / port.

KTB100
Internal thread

SUITABLE VALVES

The connection kit series KTB100 may most easily be fitted with ESBE control valve:

- Series VLE122
- Series VLE132

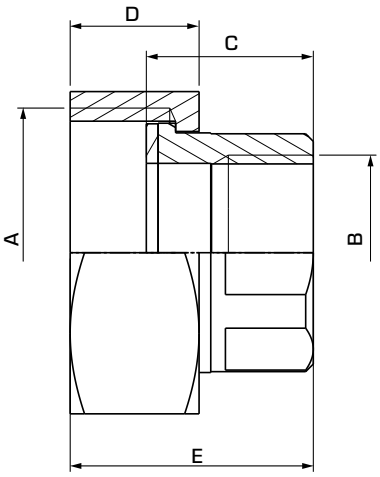

TECHNICAL DATA

Max. working pressure: PN 16
Max. temperature of medium: +150°C
Min. temperature of medium: -20°C
Connection: Internal thread, EN 10226-1
External thread, ISO 228/1

Material
Union nut: Malleable iron casting, galv.
Union end: Malleable iron casting, galv.
Standard gasket: Unitec 300



SERIES KTB112, FITTINGS INTERNAL THREAD (1 PACKAGE/PORT)

Art. No.	DN	A	B	C	D	E	T (VLE100)	Weight [kg]	Note
26100700	15	G 1"	Rp ½"	24	19	33	148	0,12	
26100800	20	G 1¼"	Rp ¾"	26	20	36	152	0,20	
26100900	25	G 1½"	Rp 1"	28,5	22	40	162	0,23	
26101000	32	G 2"	Rp 1¼"	33	24	47	171	0,41	
26101100	40	G 2¼"	Rp 1½"	35	25	50	200	0,45	
26101200	50	G 2¾"	Rp 2"	36	27	53	222	0,64	

© Copyright. Rights reserved to make alterations.